



Corded Curtain Track

CS480

- New manual cord and tear-off system for light and me-dium weight blinds
- Patented cord system with control and return runners inside the profile on both sides
- CS480 profile with large sliding channel
- The profile is hollowed out on both sides by means of a special milling cutter in order to obtain the space necessary for insertion of the runners
- Available in multiple RAL coated finishes and anodized silver (in 6m long bars) and oxidised finishes (in 3.5/2.3m long bars)
- Lateral plastic closing caps coated to match the profile
- Overhead anchorage by means of swivel brackets
- Nylon thread chutes with eyelet every 10 cm (4")
- Central, lateral, symmetrical, asymmetrical, multiple opening



FOR HAND OR DRAW ROD OPERATION USE


CS481

same profile as CS480



CS480

PROFILE 1:1



BENDING



May be bended
horizontally
Fixed radius 20
cm (7.87")

May be bended
horizontally
as per template
Minimum radius 20
cm (7.87")

FINISHES

White
RAL 9010



Black
RAL 9005



Silver



Gold




Titanium



All RAL coatings are matt - 30% Gloss.



RECESSED RUNNERS CORD SYSTEM

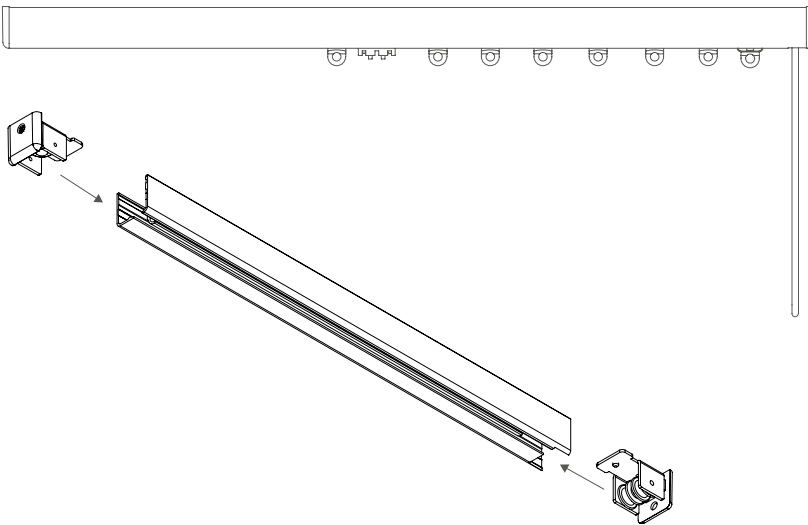


The side runners are recessed inside the profile.

The lateral opening system does not require a surmounting chute.


The last carrier perfectly touches the end of the profile.

runner pair

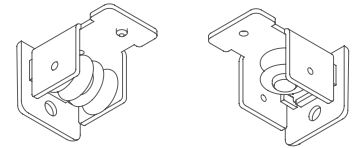


ANCHORAGE

Ceiling

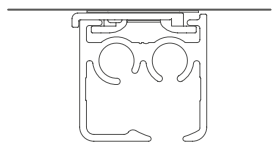

bracket




The system is fixed to the ceiling by means of swivel brackets.

The blind may be manufactured under profile or so as to cover the profile.




CS480



Universal Child Safety Device

Wall anchorage



Side anchorage



In places that may be attended by children aged between 0 and 42 months, the system must be equipped with the Child Safety device for the tensioning of the cord to be installed on the wall at at least 150 cm (59") from the floor. (UNI EN 13120 regulation).